



## Installation Instructions VIP MINI LED

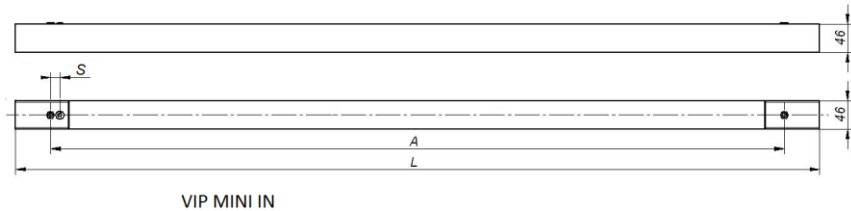

**220-240V/50-60Hz LED**

Power [W]	L [mm]	A [mm]	S [mm]	Weight [kg]
31 VIP MINI NEW	1165	965	15	1,9
38 VIP MINI NEW	1455	1255	15	2,4
31 VIP MINI IN	1320	1245	15	2,0
38 VIP MINI IN	1620	1545	15	2,5
31 VIP MINI DI OLD	1320	1210	20	1,9
38 VIP MINI DI OLD	1620	1320	20	2,4

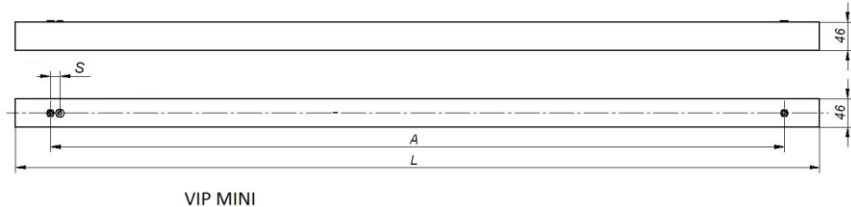

- turn off power in the circuit which the luminaire is going to be connected to,
- slide out the flaps (IN version),
- connect the joint to one side of the luminaire (only in case of linear installation),
- screw the regulators to the luminaire (or to the flap in case of the IN version) included in the suspension kit,
- pull the power cable through the hole in the luminaire (or in the flap),
- connect the power cables to the terminal accordingly to the indications on the terminal,
- mounting the luminaire on a wall/ceiling:



ceiling mounting:

- attach the top piece of the ceiling joining kit to the ceiling and the bottom piece to the regulator's sleeve on the luminaire (use the M8 screw),
- slide the luminaire with the bottom piece of the ceiling joining kit into the top piece and screw them together with M4 screws,

wall mounting:

- attach the wall joining kit to the wall with screws and anchor bolts;
- attach the luminaire to the wall joining kit through the regulator's sleeve (use the M8 screw);

suspended mounting:

- screw the simple suspension to the ceiling,
- screw the electrical suspension to the ceiling,
- pull the suspension lines through the line regulators.

### Important warnings:

Luminaires may be installed by qualified and registered personnel only.  
Any manipulation inside the luminaire when the power is activated causes the risk of electric shock.  
The manufacturer is not responsible for any flaws resulting from actions not compliant with these instructions.  
The manufacturer reserves the right to change the construction of the product.  
Do not install the luminaire in places without sufficient air circulation.  
To guarantee safe luminaire operation, please follow the instructions in the installation instructions.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remind obligations towards separate collection. For correct disposal, please use authorized waste disposal facilities or return to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting to the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

