


Product data sheet



Standard rotary dimmer LED

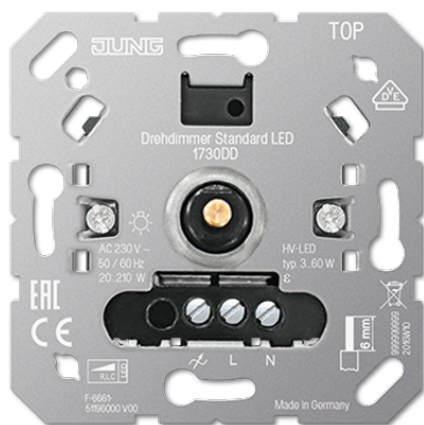

Reference number

1730 DD

Standard rotary dimmer LED

incremental control without end position
without satellite input

Intended use

- Switching and dimming of lighting
- Operation with suitable cover
- Installation in flush-box according to DIN 49073

Product characteristics

- Device works according to the leading edge phase control or trailing edge phase control principle
- Automatic setting of the dimming principle suitable for the load
- Device can be operated without neutral conductor
- Switch-on via bulb-preserving soft start
- Switch-on with last brightness or saved switch-on brightness
- Switch-on brightness can be saved permanently
- Minimum brightness can be saved permanently
- Electronic short-circuit protection with permanent switch-off after 7 seconds at the latest
- Electronic over-temperature protection
- Power extension possible by means of power boosters

Centre plates:

AS / A ranges: ref.-no. A 1540 ..

CD range: ref.-no. CD 1540 ..

SL range: ref.-no. SL 1540 ..

LS range: ref.-no. LS 1940 .., .. 1940 ..

Technical data

Rated voltage:	AC 230 V ~
Mains frequency:	50/60 Hz
Stand-by power:	approx. 0.35 W
Power loss:	approx. 2 W
Ambient temperature:	-5 ... +45 °C
Connected load at 25 °C	
Incandescent lamps:	20 ... 210 W
HV halogen lamps:	20 ... 210 W
Electronic transformers:	20 ... 210 W
Electronic transformers with LV LED:	typical 20 ... 60 W
Inductive transformers:	20 ... 210 VA
Inductive transformers with LV LED:	typical 20 ... 60 VA
Dimmable HV LED lamps:	typical 3 ... 60 W
Dimmable compact fluorescent lamps:	typical 3 ... 60 W
Ohmic-capacitive:	20 ... 210 W
Capacitive-inductive:	not permitted
Ohmic-inductive:	20 ... 210 VA

Ohmic and HV LED:	typical 3 ... 60 W
Ohmic and CFL:	typical 3 ... 60 W
Operation without neutral conductor: Minimum load 50 W. Does not apply to loads with HV LED and compact fluorescent lamps.	
Amplifiers:	see instructions for amplifier
Connection:	screw terminals
single wire:	1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ²
stranded without ferrule:	1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ²
stranded with ferrule:	1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 1.5 mm ²
Total length power cable:	max. 100 m

