

DIMAX 542 plus S

Article number: 5420130

**Description**




- \*Available october 2018\*
- Universal dimmer for R, L and C loads with automatic load detection
- Push button operation, setting via potentiometer
- Adjustable minimum brightness for LEDs
- The universal dimmer is equipped with a "gentle" lamp-conserving function for switching on and off, automatic detection of the load type, overheating protection against overload as well as short-circuit protection
- Optimised settings for LEDs, incandescent lamps
- Easy installation thanks to a highly compact housing
- Ideal for all dimmable LEDs and halogen lamps
- Memory function saves the most recently set light level value and then dims to this value the next time it is switched on
- Convenient snooze function

**Technical data**

Operating voltage	230 V AC
Frequency	50 – 60 Hz
Installation type	Flush-mounted
Stand-by consumption	~0,15 W
Incandescent/halogen lamp load	250 W
Transformer electronic (C)	250 W
LED lamp	Trailing edge: 250 W
Programmierung per App	–
Multi-function	–
Ambient temperature	-25 °C ... +45 °C

**Connection example**

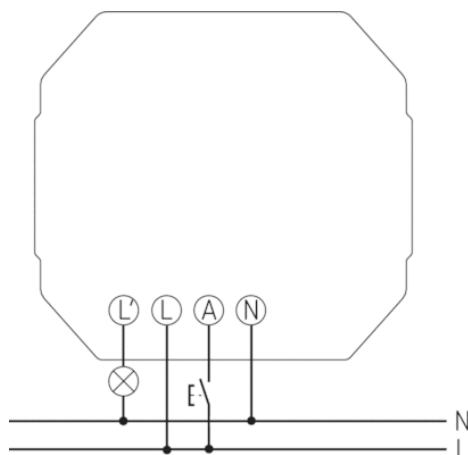

## Scale drawings

