

HighBay LED LITE

High Bay


A new generation of an industrial reflector with integrated high efficiency LEDs. The extremely reduced weight of the body allows for easy installation.



GENERAL CHARACTERISTICS

- Equivalent Power*** 135, 200 W
- Power supply** 230 VAC - 50/60 Hz
- Standard** EN60598-1; EN60598-2-1; EN 62471
- Protection grade** IP65
- Working temp.** -20 °C ÷ +40 °C
- Mounting** Ceiling
- Housing** Die-cast aluminum, black
- Diffuser** Microprismatic tempered glass
- Driver** Integrated, electronic
- Life** >30 000 h


* Equivalent power for comparison with fluorescent tube fixtures

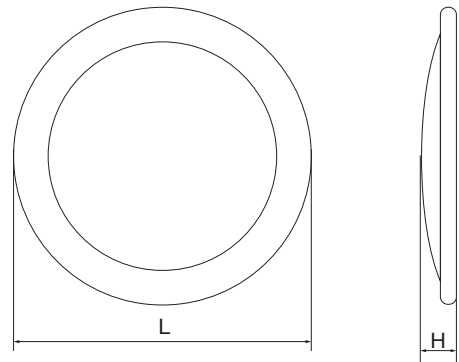

Power W	• Dimensions (mm) • Ø H		Weight kg
135	340	106	-
200	400	121	-



Suspended mounting

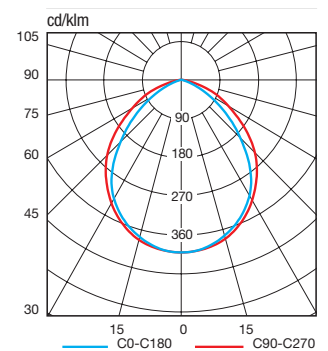

LED

W	Code	Description	EAN	Assorbimento W	N° LED	Colour Temp. K	Colour rendering	Flux of LEDs (lm)	Flux of fixture (lm)	lm/W	Energy Class	Package
135	76303	LITE Highbay LED 135W BLACK 4K	8002219737649	135	162	4000K	>80	17000	13000	96	A+	1
200	76304	LITE Highbay LED 200W BLACK 4K	8002219737656	200	216	4000K	>80	26000	20000	100	A+	1