



Imola LED



Luminaire with powerful LED light sources of well know producers. Application: for offices, corridors and open spaces.

Materials: Body made of powder painted steel sheet and aluminium frame in white colour. OPAL diffuser.

Installation: Into modular ceiling 600x600 with a visible supported structure.

Power: 230V

ELECTRICAL DATA

Light source	LED
Luminaire power	26 W
Number of light sources	1
Light source power	24W
Voltage rating	230 V
Type of LED	5630

INFORMATION

Operating temperature range	-15 ... 40 °C
-----------------------------	---------------

CERTIFICATES

Degree of protection (IP)	IP40
Degree of protection (IP) / top/	IP20
Class of protection	I
EAC	Yes


LIGHT DATA

Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 54000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	89 %

AVAILABLE VARIANTS

Product code	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature [K]
PX1310101	3310	127	3000
PX1310108	3410	131	4000

DIMENSIONS

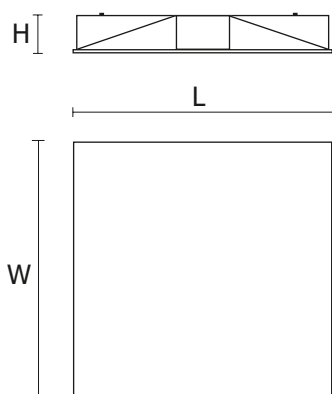

L [mm]	W [mm]	H [mm]
596	596	75

L = Length | W = Width | H = Height / Depth