

PRODUCT FAMILY DATASHEET

LED STAR STICK

LED lamps, classic stick shape



AREAS OF APPLICATION

- All domestic rooms, especially where the lamps are visible
- Wherever compact and efficient lamps are needed
- Where the lamps need to last a long time or have to withstand frequent on/off switching

PRODUCT BENEFITS

- Low energy consumption
- Attractive lamp appearance

PRODUCT FEATURES

- LED alternative to conventional lamps
- Good quality of light; color rendering index $R_a: \geq 80$; constant chromaticity
- Mercury-free lamps



TECHNICAL DATA





Product description	Electrical data		Photometrical data							Light technical data	Dimensions & weight
	Nominal wattage	Nominal voltage	Rated luminous flux	Color temperature	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra	Warm-up time (60 %)	Overall length
LED STAR STICK 60 FR 8 W/2700 K E27 ¹⁾	8.00 W	220...240 V	806 lm	2700 K	0.70	Warm White	2700 K	806 lm	≥80	< 0.50 s	115.0 mm
LED STAR STICK 60 FR 8 W/4000 K E27 ¹⁾	8.00 W	220...240 V	806 lm	4000 K	0.70	Cool White	4000 K	806 lm	≥80	< 0.50 s	115.0 mm
LED STAR STICK 60 FR 8 W/2700 K E14 ¹⁾	8.00 W	220...240 V	806 lm	2700 K	0.70	Warm White	2700 K	806 lm	≥80	< 0.50 s	115.0 mm
LED STAR STICK 60 FR 8 W/4000 K E14 ¹⁾	8.00 W	220...240 V	806 lm	4000 K	0.70	Cool White	4000 K	806 lm	≥80	< 0.50 s	115.0 mm
LED STAR STICK 75 FR 10 W/2700 K E27 ¹⁾	10.00 W	220...240 V	1055 lm	2700 K	0.70	Warm White	2700 K	1055 lm	≥80	< 0.50 s	115.0 mm
LED STAR STICK 75 FR 10 W/2700 K E14 ¹⁾	10.00 W	220...240 V	1055 lm	2700 K	0.70	Warm White	2700 K	1055 lm	≥80	< 0.50 s	115.0 mm
LED STAR STICK 75 FR 10 W/4000 K E27 ¹⁾	10.00 W	220...240 V	1055 lm	4000 K	0.70	Cool White	4000 K	1055 lm	≥80	< 0.50 s	115.0 mm
LED STAR STICK 75 FR 10 W/4000 K E14 ¹⁾	10.00 W	220...240 V	1055 lm	4000 K	0.70	Cool White	4000 K	1055 lm	≥80	< 0.50 s	115.0 mm

Product description	Diameter	Temperatures & operating conditions	Lifespan		Additional product data		Capabilities	Certificates & standards
		Maximum temperature at tc test point	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable	Energy efficiency class
LED STAR STICK 60 FR 8 W/2700 K E27 ¹⁾	37.2 mm	90 °C	15000 h	100000	E27	Yes	No	A+
LED STAR STICK 60 FR 8 W/4000 K E27 ¹⁾	37.2 mm	90 °C	15000 h	100000	E27	Yes	No	A+
LED STAR STICK 60 FR 8 W/2700 K E14 ¹⁾	37.2 mm		15000 h	100000	E14	Yes	No	A+

Product description	Diameter	Temperatures & operating conditions	Lifespan		Additional product data		Capabilities	Certificates & standards
		Maximum temperature at tc test point	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable	Energy efficiency class
LED STAR STICK 60 FR 8 W/4000 K E14 ¹⁾	37.2 mm		15000 h	100000	E14	Yes	No	A+
LED STAR STICK 75 FR 10 W/2700 K E27 ¹⁾	37.2 mm	90 °C	15000 h	100000	E27	Yes	No	A+
LED STAR STICK 75 FR 10 W/2700 K E14 ¹⁾	37.2 mm		15000 h	100000	E14	Yes	No	A+
LED STAR STICK 75 FR 10 W/4000 K E27 ¹⁾	37.2 mm	90 °C	15000 h	100000	E27	Yes	No	A+
LED STAR STICK 75 FR 10 W/4000 K E14 ¹⁾	37.2 mm		15000 h	100000	E14	Yes	No	A+

Product description	Country-specific categorizations
	ILCOS
LED STAR STICK 60 FR 8 W/2700 K E27 ¹⁾	DRSGT/F-7/827-230-E27-41
LED STAR STICK 60 FR 8 W/4000 K E27 ¹⁾	DRSGT/F-7/827-230-E27-41
LED STAR STICK 60 FR 8 W/2700 K E14 ¹⁾	
LED STAR STICK 60 FR 8 W/4000 K E14 ¹⁾	
LED STAR STICK 75 FR 10 W/2700 K E27 ¹⁾	DRSGT/F-10/827-230-E27-41
LED STAR STICK 75 FR 10 W/2700 K E14 ¹⁾	
LED STAR STICK 75 FR 10 W/4000 K E27 ¹⁾	DRSGT/F-10/827-230-E27-41
LED STAR STICK 75 FR 10 W/4000 K E14 ¹⁾	

¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

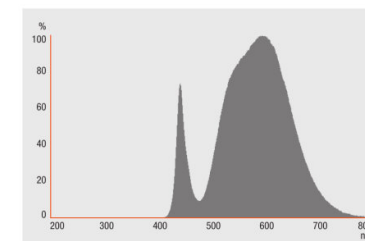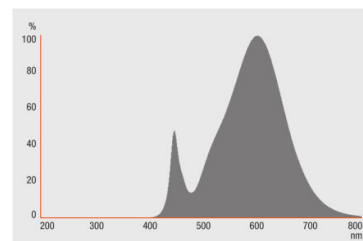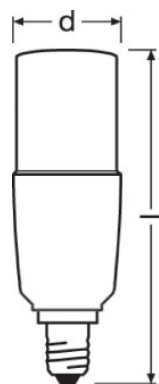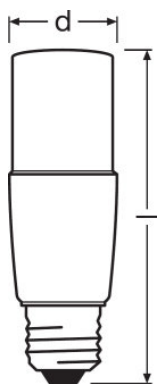

LED STAR STICK 60 FR 8 W/2700 K E27,
LED STAR STICK 60 FR 8 W/4000 K E27,
LED STAR STICK 75 FR 10 W/2700 K
E27, LED STAR STICK 75 FR 10 W/4000
K E27

LED STAR STICK 60 FR 8 W/2700 K E14,
LED STAR STICK 60 FR 8 W/4000 K E14,
LED STAR STICK 75 FR 10 W/2700 K
E14, LED STAR STICK 75 FR 10 W/4000
K E14

LED STAR STICK 75 FR 10 W/2700 K
E27

LED STAR STICK 75 FR 10 W/4000 K
E27

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075059153	LED STAR STICK 60 FR 8 W/2700 K E27	Shipping carton box 10	223 mm x 106 mm x 127 mm	3.00 dm ³	570.00 g
4058075815919	LED STAR STICK 60 FR 8 W/2700 K E27	Shipping carton box 6	285 mm x 153 mm x 136 mm	5.93 dm ³	406.00 g
4058075059177	LED STAR STICK 60 FR 8 W/4000 K E27	Shipping carton box 10	223 mm x 106 mm x 127 mm	3.00 dm ³	571.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075815933	LED STAR STICK 60 FR 8 W/4000 K E27	Shipping carton box 6	285 mm x 153 mm x 136 mm	5.93 dm ³	406.00 g
4058075125766	LED STAR STICK 60 FR 8 W/2700 K E14	Shipping carton box 6	285 mm x 153 mm x 136 mm	5.93 dm ³	608.00 g
4058075125704	LED STAR STICK 60 FR 8 W/4000 K E14	Shipping carton box 6	285 mm x 153 mm x 136 mm	5.93 dm ³	608.00 g
4058075059191	LED STAR STICK 75 FR 10 W/2700 K E27	Shipping carton box 10	223 mm x 106 mm x 127 mm	3.00 dm ³	596.00 g
4058075815957	LED STAR STICK 75 FR 10 W/2700 K E27	Shipping carton box 6	285 mm x 153 mm x 136 mm	5.93 dm ³	424.00 g
4058075125742	LED STAR STICK 75 FR 10 W/2700 K E14	Shipping carton box 6	285 mm x 153 mm x 136 mm	5.93 dm ³	614.00 g
4058075059214	LED STAR STICK 75 FR 10 W/4000 K E27	Shipping carton box 10	223 mm x 106 mm x 127 mm	3.00 dm ³	597.00 g
4058075815971	LED STAR STICK 75 FR 10 W/4000 K E27	Shipping carton box 6	285 mm x 153 mm x 136 mm	5.93 dm ³	425.00 g
4058075125728	LED STAR STICK 75 FR 10 W/4000 K E14	Shipping carton box 6	285 mm x 153 mm x 136 mm	5.93 dm ³	614.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.