



Torino AS LED



Independently installed luminaire of asymmetric light distribution designed for LEDs. Torino AS LED is a great solution for illuminating shop shelves, blackboards and any surfaces requiring additional lighting.

Materials: Housing made of electrostatically painted steel sheets (white color), asymmetric reflector of polished and anodized aluminum.

Installation: Ceiling mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Type of LED	5630
Power factor	0.95
SELV	No

MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Steel sheet

INFORMATION

Colour	White
Operating temperature range	-20 ... 35 °C

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Energy class	A+
CE	Yes
EAC	Yes

LIGHT DATA

Light colour	White
Color rendering index	83
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 54000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	89 %


OPTICAL DATA

Reflector	Mat
-----------	-----

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature [K]	Weight [kg]
PX4087201	17	1580	92	3000	1.80
PX4087208	17	1600	94	4000	1.80
PX4087215	32	3280	102	3000	3.40
PX4087222	32	3350	104	4000	3.40

DIMENSIONS

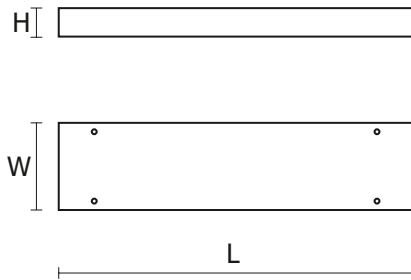

Product code	L [mm]	W [mm]	H [mm]
PX4087201	610	172	80
PX4087208	610	172	80
PX4087215	1170	172	80
PX4087222	1170	172	80

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]	B [mm]
PX4087201	480	79
PX4087208	480	79
PX4087215	950	79
PX4087222	950	79

A = Spacing length | B = Spacing width