



Velo LED



New version of very popular Velo luminaire made for LEDs. Modification has been made with subtle aluminum profile instead of steel sheets and with adding the possibility for inline installation (only in OPAL version). Thanks to its shape VELO LED fits perfectly in corners and thus is great for illumination in corridors, staircases and other places with limited space.

Note: Through wiring on request

Materials: Electrostatically painted aluminum profile (standard color: grey), microprismatic diffuser (MPRM) made of PMMA or OPAL diffuser made of polycarbonate.

Installation: Wall mounted, suspended.

Accessories: Suspensions (simple PX0922143, electric PX0922021), linear joint, end caps.

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	230 V
For through out powering	Yes
Light source included	Yes
Type of LED	5630

MECHANICAL DATA

Housing material	Aluminum
Designed for light-line	Yes

INFORMATION

Colour	Grey
Operating temperature range	0 ... 40 °C

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Energy class	A+
CE	Yes
EAC	Yes
For ceiling installation, fire class "F" (L)	Yes

LIGHT DATA

Light colour	White
Color rendering index	83
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 54000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	90 %

OPTICAL DATA

Reflector	High gloss
-----------	------------


AVAILABE VARIANTS

Product code	Luminaire power [W]	Type of installation	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature [K]	Weight [kg]
PX4022813	24	Wall mounted	OPAL	2730	113	3000	2.30

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Type of installation	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature [K]	Weight [kg]
PX4022820	24	Wall mounted	OPAL	2790	116	4000	2.30
PX4022827	31	Wall mounted	OPAL	3640	117	3000	2.90
PX4022834	31	Wall mounted	OPAL	3720	120	4000	2.90
PX4022841	38	Wall mounted	OPAL	4570	120	3000	3.70
PX4022848	38	Wall mounted	OPAL	4660	122	4000	3.70
PX4022855	44	Wall mounted	OPAL	5480	124	3000	4.40
PX4022862	44	Wall mounted	OPAL	5600	127	4000	4.40
PX4022869	24	Wall mounted	MPRM	2740	114	3000	2.30
PX4022876	24	Wall mounted	MPRM	2800	116	4000	2.30
PX4022883	31	Wall mounted	MPRM	3680	118	3000	2.90
PX4022890	31	Wall mounted	MPRM	3760	121	4000	2.90
PX4022897	38	Wall mounted	MPRM	4650	122	3000	3.70
PX4022904	38	Wall mounted	MPRM	4750	125	4000	3.70
PX4022911	44	Wall mounted	MPRM	5600	127	3000	4.40
PX4022918	44	Wall mounted	MPRM	5720	130	4000	4.40
PX4022701	24	Suspended	OPAL	2730	113	3000	2.30
PX4022708	24	Suspended	OPAL	2790	116	4000	2.30
PX4022715	31	Suspended	OPAL	3640	117	3000	2.90
PX4022722	31	Suspended	OPAL	3720	120	4000	2.90
PX4022729	38	Suspended	OPAL	4570	120	3000	3.70
PX4022736	38	Suspended	OPAL	4660	122	4000	3.70
PX4022743	44	Suspended	OPAL	5480	124	3000	4.40
PX4022750	44	Suspended	OPAL	5600	127	4000	4.40
PX4022757	24	Suspended	MPRM	2740	114	3000	2.30
PX4022764	24	Suspended	MPRM	2800	116	4000	2.30
PX4022771	31	Suspended	MPRM	3680	118	3000	2.90
PX4022778	31	Suspended	MPRM	3760	121	4000	2.90
PX4022785	38	Suspended	MPRM	4650	122	3000	3.70
PX4022792	38	Suspended	MPRM	4750	125	4000	3.70
PX4022799	44	Suspended	MPRM	5600	127	3000	4.40
PX4022806	44	Suspended	MPRM	5720	130	4000	4.40

DIMENSIONS

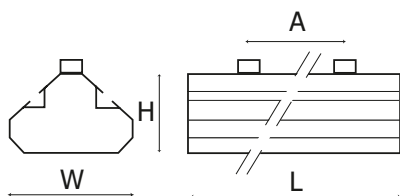

Product code	L [mm]	W [mm]	H [mm]
PX4022813	875	101	64
PX4022820	875	101	64
PX4022827	1165	101	64
PX4022834	1165	101	64
PX4022841	1455	101	64
PX4022848	1455	101	64
PX4022855	1745	101	64
PX4022862	1745	101	64
PX4022869	875	101	64
PX4022876	875	101	64
PX4022883	1165	101	64
PX4022890	1165	101	64
PX4022897	1455	101	64
PX4022904	1455	101	64
PX4022911	1745	101	64
PX4022918	1745	101	64
PX4022701	875	101	64
PX4022708	875	101	64
PX4022715	1165	101	64
PX4022722	1165	101	64
PX4022729	1455	101	64
PX4022736	1455	101	64
PX4022743	1745	101	64
PX4022750	1745	101	64
PX4022757	875	101	64
PX4022764	875	101	64
PX4022771	1165	101	64
PX4022778	1165	101	64
PX4022785	1455	101	64
PX4022792	1455	101	64
PX4022799	1745	101	64
PX4022806	1745	101	64

ACCESSORIES

Structural element



End cap

PX4022260

Grey

Connecting element



Sigma/Velo/VIP/VIP G/K Invisible linear joint
Set (2 pcs)
Pieces in set: 2

PX0922227

Grey