


BRYAN PENDANT LED SUPREME

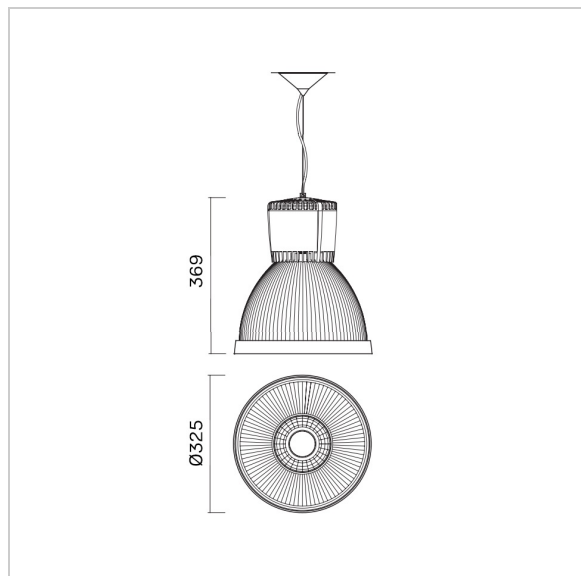

Pendant LED luminaire available in white, grey and black color. Available in CCT from 2700K till 5700K in CRI80 or CRI90 specify this luminaire for showroom applications. The luminaire can be supplied with reflector made of aluminium (Ø325mm) or clear polycarbonate (Ø315mm or Ø410mm). Supplied with 3m suspension set.

SKU	Luminous Flux	Connected Load	CCT	CRI	Color housing	Beam angle
<u>4.004E0A8300040C0000</u>	3250Lm	26W	3000K	(RA) >80	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004E0A9300040C0000</u>	3050Lm	30W	3000K	(RA) >90	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004F0A840004000000</u>	3400Lm	26W	4000K	(RA) >80	White (RAL 9003) / clear reflector Ø315	40°

Sku	Luminous Flux	Connected Load	CCT	CRI	Color housing	Beam angle
<u>4.004F0A8400040C0000</u>	3400Lm	26W	4000K	(RA) >80	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004F0A9400040C0000</u>	3300Lm	30W	4000K	(RA) >90	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004G0A8300040C0000</u>	4200Lm	33W	3000K	(RA) >80	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004G0A9300040C0000</u>	4100Lm	38.5W	3000K	(RA) >90	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004H0A8300040C0000</u>	4500Lm	45W	3000K	(RA) >90	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004H0A8400040C0000</u>	4450Lm	33W	4000K	(RA) >80	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004H0A9400040C0000</u>	4400Lm	38.5W	4000K	(RA) >90	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004I0A9400040C0000</u>	4850lm	45W	4000K	(RA) >90	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004J0A8300040C0000</u>	5300lm	45W	3000K	(RA) >80	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004J0A8400040C0000</u>	5600lm	45W	4000K	(RA) >80	White (RAL 9003) / clear reflector Ø315	40°
<u>4.004E0A830004000000</u>	3250Lm	26W	3000K	(RA) >80	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004E0A930004000000</u>	3050Lm	30W	3000K	(RA) >90	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004F0A940004000000</u>	3300Lm	30W	4000K	(RA) >90	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004G0A830004000000</u>	4200Lm	33W	3000K	(RA) >80	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004G0A930004000000</u>	4100Lm	38.5W	3000K	(RA) >90	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004H0A830004000000</u>	4500Lm	45W	3000K	(RA) >90	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004H0A840004000000</u>	4450Lm	33W	4000K	(RA) >80	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004H0A940004000000</u>	4400Lm	38.5W	4000K	(RA) >90	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004I0A940004000000</u>	4850lm	45W	4000K	(RA) >90	White (RAL 9003) / alu reflector Ø325	40°

Sku	Luminous Flux	Connected Load	CCT	CRI	Color housing	Beam angle
<u>4.004J0A830004000000</u>	5300lm	45W	3000K	(RA) >80	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004J0A840004000000</u>	5600lm	45W	4000K	(RA) >80	White (RAL 9003) / alu reflector Ø325	40°
<u>4.004G0C8300040C0000</u>	4200Lm	33W	3000K	(RA) >80	Grey (RAL 9006) / clear reflector Ø315	40°
<u>4.004G0C9300040C0000</u>	4100Lm	38.5W	3000K	(RA) >90	Grey (RAL 9006) / clear reflector Ø315	40°
<u>4.004H0C8400040C0000</u>	4450Lm	33W	4000K	(RA) >80	Grey (RAL 9006) / clear reflector Ø315	40°
<u>4.004I0C940PW40C0000</u>	4850lm	45W	4000K	(RA) >90	Grey (RAL 9006) / clear reflector Ø315	40°
<u>4.004J0C8300040C0000</u>	5300lm	45W	3000K	(RA) >80	Grey (RAL 9006) / clear reflector Ø315	40°
<u>4.004J0C8400040C0000</u>	5600lm	45W	4000K	(RA) >80	Grey (RAL 9006) / clear reflector Ø315	40°
<u>4.004E0C830004000000</u>	3250Lm	26W	3000K	(RA) >80	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004E0C930004000000</u>	3050Lm	30W	3000K	(RA) >90	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004F0C840004000000</u>	3400Lm	26W	4000K	(RA) >80	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004F0C940PW4000000</u>	3300Lm	30W	4000K	(RA) >90	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004G0C830004000000</u>	4200Lm	33W	3000K	(RA) >80	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004G0C930004000000</u>	4100Lm	38.5W	3000K	(RA) >90	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004H0C840004000000</u>	4450Lm	33W	4000K	(RA) >80	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004H0C930004000000</u>	4500Lm	45W	3000K	(RA) >90	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004H0C940PW4000000</u>	4400Lm	38.5W	4000K	(RA) >90	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004I0C940PW4000000</u>	4850lm	45W	4000K	(RA) >90	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004J0C830004000000</u>	5300lm	45W	3000K	(RA) >80	Grey (RAL 9006) / alu reflector Ø325	40°

Sku	Luminous Flux	Connected Load	CCT	CRI	Color housing	Beam angle
<u>4.004J0C840004000000</u>	5600lm	45W	4000K	(RA) >80	Grey (RAL 9006) / alu reflector Ø325	40°
<u>4.004F0B8400040C0000</u>	3400Lm	26W	4000K	(RA) >80	Black (RAL 9005) / clear reflector Ø315	40°
<u>4.004G0B8300040C0000</u>	4200Lm	33W	3000K	(RA) >80	Black (RAL 9005) / clear reflector Ø315	40°
<u>4.004G0B9300040C0000</u>	4100Lm	38.5W	3000K	(RA) >90	Black (RAL 9005) / clear reflector Ø315	40°
<u>4.004I0B940PW40C0000</u>	4850lm	45W	4000K	(RA) >90	Black (RAL 9005) / clear reflector Ø315	40°
<u>4.004J0B8400040C0000</u>	5600lm	45W	4000K	(RA) >80	Black (RAL 9005) / clear reflector Ø315	40°
<u>4.004E0B830004000000</u>	3250Lm	26W	3000K	(RA) >80	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004E0B930004000000</u>	3050Lm	30W	3000K	(RA) >90	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004F0B840004000000</u>	3400Lm	26W	4000K	(RA) >80	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004F0B940PW4000000</u>	3300Lm	30W	4000K	(RA) >90	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004G0B830004000000</u>	4200Lm	33W	3000K	(RA) >80	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004G0B930004000000</u>	4100Lm	38.5W	3000K	(RA) >90	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004H0B840004000000</u>	4450Lm	33W	4000K	(RA) >80	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004H0B930004000000</u>	4500Lm	45W	3000K	(RA) >90	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004H0B940PW4000000</u>	4400Lm	38.5W	4000K	(RA) >90	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004I0B940PW4000000</u>	4850lm	45W	4000K	(RA) >90	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004J0B830004000000</u>	5300lm	45W	3000K	(RA) >80	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004J0B840004000000</u>	5600lm	45W	4000K	(RA) >80	Black (RAL 9005) / alu relfector Ø325	40°
<u>4.004J0B8300040C0000</u>	5300lm	45W	3000K	(RA) >80	Black (RAL 9005)	40°

