

CoreLine Recessed

RC120B LED27S/840 PSU W60L60 EL3

Coreline Recessed - LED Module, system flux 2700 lm - 840 neutral white - Power supply unit - Width 0.60 m, length 0.60 m - Emergency lighting 3 hours duration

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Recessed range of LED products can be used to replace functional luminaires in general lighting applications. The process of selecting, installing and maintaining is so easy – it's a simple switch.;InterAct Ready luminaires with integrated wireless communications in this family available, to be used with InterAct gateways, sensors and software.

Product data

General Information			
Number of light sources	2 pcs	Cable	-
Lamp family code	LED27S [LED Module, system flux 2700 lm]	Protection class IEC	Safety class I
Light source color	840 neutral white	Glow-wire test	Temperature 850 °C, duration 30 s
Cap-Base	- [-]	Flammability mark	For mounting on normally flammable surfaces
Light source replaceable	No	Safety device	SC [Safety cable]
Number of gear units	1 unit	CE mark	CE mark
Gear	EB [Electronic]	ENEC mark	ENEC mark
Driver/power unit/transformer	Power supply unit	UL mark	-
Driver included	Yes	Warranty period	3 years + 2 years upon registration
Optic type	Wide beam	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018"; statistically there is no relevant difference in lumen maintenance between B50 and for example
Optical cover/lens type	Polycarbonate linear satinized		
Luminaire light beam spread	86°		
Emergency lighting	Emergency lighting 3 hours duration		
Connection	Push-in connector and pull relief		

CoreLine Recessed

	B10. Therefore the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB of 16 A type B	24
RoHS mark	RoHS mark
Product family code	RC120B [Coreline Recessed]
Unified glare rating CEN	Not applicable

Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Inrush current	5.3 A
Inrush time	0.07 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Geometry	Width 0.60 m, length 0.60 m
Housing Material	Steel
Reflector material	Steel
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Gear tray material	Steel
Fixation material	-
Optical cover/lens finish	Textured
Overall length	597 mm
Overall width	597 mm
Overall height	32 mm
Color	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
-------------------------	--------------------------

Mech. impact protection code	IK02 [0.2 J standard]
------------------------------	------------------------

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	2700 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	82 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	≥80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	30.7 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L75


Application Conditions

Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Suitable for random switching	Yes

Product Data

Full product code	871869632069300
Order product name	RC120B LED27S/840 PSU W60L60 EL3
EAN/UPC - Product	8718696320693
Order code	910925863279
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925863279
Net Weight (Piece)	3.300 kg

Dimensional drawing

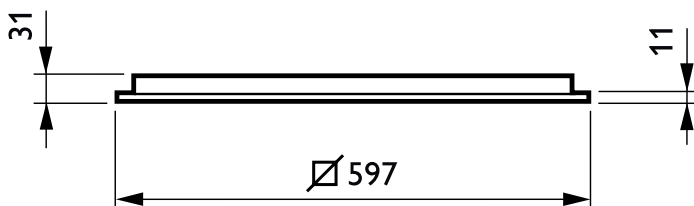

CoreLine Recessed RC120B/RC122B

