




Installation Instructions VIP LED


220-240V/50-60Hz LED

| Power [W] | L [mm] | Weight [kg] |
|-----------|--------|-------------|
| 17 | 585 | 1,5 kg |
| 24 | 875 | 2,2 kg |
| 31 | 1165 | 2,8 kg |
| 38 | 1455 | 3,4 kg |
| 44 | 1745 | 4,1 kg |
| 52 | 2035 | 4,8 kg |

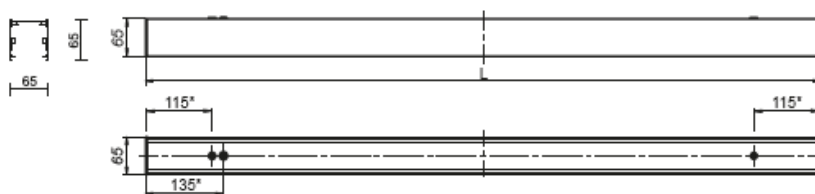


* Dla wersji 585 mm wymiary pomniejszone o 85 mm
 * For 585 mm version demensions reduced by 85 mm

- Turn off the power in the circuit which the luminaire is going to be connected to; Carefully take the luminaire out of the package.
- Assemble the suspension of the luminaire (follow the suspension instruction manual).
- Carefully take the luminaire out of the package.
- Slide out the diffuser and remove the LED module fixed with magnets.
- Install the suspension wire regulators included in the set with the luminaire.
- Pull the suspension lines through the regulators (the lines are included in the set with the luminaire).
- Pull the power cable through the hole in the luminaire and connect it as indicated on the connection terminal.
- Connect the LED source cables to the blocks in the luminaire as indicated on the figure below. Pay special attention to the polarity while connecting the cables.
 (Attention: Reverse connection can result in permanent damage to the LED sources.)
- Reattach the LED module plate.
- Slide the diffuser back in and attach the end caps to the luminaire.



Attention:

- Use linear joining kits to connect the luminaires in a line. The screws should be tightened without using too much force not to cause any deformation to the profile.
- Fix end caps to the ends of a luminous line.

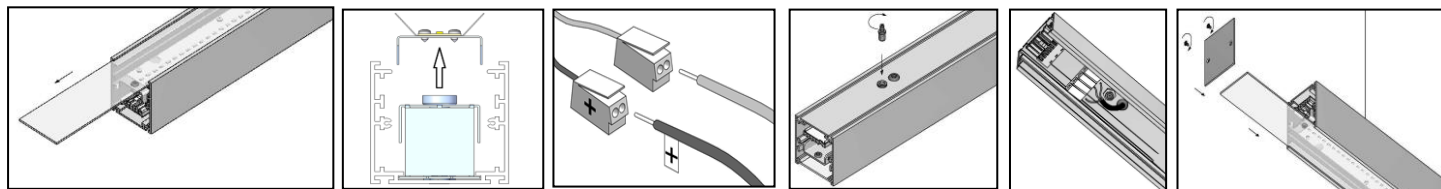

Important warnings:

The luminaires may be installed by qualified registered personnel only. Any manipulation inside the luminaires when the power is activated causes the risk of electrical shock.

The manufacturer is not responsible for any flaws resulting from non-compliance with these instructions. The manufacturer reserves the right to change the construction of the luminaire. Do not install the luminaire in places without sufficient air circulation. To guarantee safe luminaire functioning, please follow the installation instructions.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must not be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remind obligations towards separate collection. For correct disposal, please use authorized waste disposal facilities or return to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting to the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

