


**Contactor, 3p+1N/O, 11kW/400V/AC3**

**Part no.** DILM25-10(230V50HZ,240V60HZ)  
**Catalog No.** 277132  
**Eaton Catalog No.** XTCE025C10F  
**EL-Nummer** 0004130343  
**(Norway)**

## Delivery program

|                      |  |  |                                                                                                                                                                                                                            |
|----------------------|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product range        |  |  | Contactors                                                                                                                                                                                                                 |
| Application          |  |  | Contactors for Motors                                                                                                                                                                                                      |
| Subrange             |  |  | Contactors up to 170 A, 3 pole                                                                                                                                                                                             |
| Utilization category |  |  | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>NAC-3: Normal AC induction motors: starting, switch off during running<br>AC-4: Normal AC induction motors: starting, plugging, reversing, inching |
|                      |  |  |                                                                                                                                          |
| Notes                |  |  | Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging.                                                                                                    |
| Connection technique |  |  | Screw terminals                                                                                                                                                                                                            |
| Number of poles      |  |  | 3 pole                                                                                                                                                                                                                     |


## Rated operational current

|                                                           |                |   |     |
|-----------------------------------------------------------|----------------|---|-----|
| AC-3                                                      |                |   |     |
| 380 V 400 V                                               | $I_e$          | A | 25  |
| AC-1                                                      |                |   |     |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |     |
| Open                                                      |                |   |     |
| at 40 °C                                                  | $I_{th} = I_e$ | A | 45  |
| enclosed                                                  | $I_{th}$       | A | 36  |
| Conventional free air thermal current, 1 pole             |                |   |     |
| open                                                      | $I_{th}$       | A | 100 |
| enclosed                                                  | $I_{th}$       | A | 90  |

## Max. rating for three-phase motors, 50 - 60 Hz

|             |   |    |     |
|-------------|---|----|-----|
| AC-3        |   |    |     |
| 220 V 230 V | P | kW | 7.5 |
| 380 V 400 V | P | kW | 11  |
| 660 V 690 V | P | kW | 14  |
| AC-4        |   |    |     |
| 220 V 230 V | P | kW | 3.5 |
| 380 V 400 V | P | kW | 6   |
| 660 V 690 V | P | kW | 8.5 |

## Contacts


|                     |  |  |                                                                                      |
|---------------------|--|--|--------------------------------------------------------------------------------------|
| N/O = Normally open |  |  | 1 N/O                                                                                |
| Contact sequence    |  |  |  |

## Instructions

|                                        |  |  |                                                 |
|----------------------------------------|--|--|-------------------------------------------------|
| Can be combined with auxiliary contact |  |  | DILM32-XHI..<br>DILA-XHI(V)..<br>DILM32-XHI11-S |
| Actuating voltage                      |  |  | 230 V 50 Hz, 240 V 60 Hz                        |
| Voltage AC/DC                          |  |  | AC operation                                    |
| Connection to SmartWire-DT             |  |  | no                                              |

## Technical data

### General
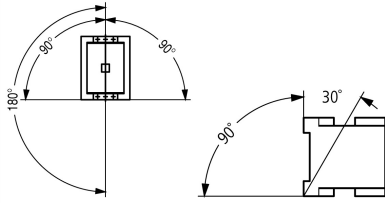
|                                                                       |              |                 |                                                                                    |
|-----------------------------------------------------------------------|--------------|-----------------|------------------------------------------------------------------------------------|
| Standards                                                             |              |                 | IEC/EN 60947, VDE 0660, UL, CSA                                                    |
| Lifespan, mechanical                                                  |              |                 |                                                                                    |
| AC operated                                                           | Operations   | $\times 10^6$   | 10                                                                                 |
| Operating frequency, mechanical                                       |              |                 |                                                                                    |
| AC operated                                                           | Operations/h |                 | 5000                                                                               |
| Climatic proofing                                                     |              |                 | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30     |
| Ambient temperature                                                   |              |                 |                                                                                    |
| Open                                                                  |              | °C              | -25 - +60                                                                          |
| Enclosed                                                              |              | °C              | - 25 - 40                                                                          |
| Storage                                                               |              | °C              | - 40 - 80                                                                          |
| Mounting position                                                     |              |                 |  |
| Mechanical shock resistance (IEC/EN 60068-2-27)                       |              |                 |                                                                                    |
| Half-sinusoidal shock, 10 ms                                          |              |                 |                                                                                    |
| Main contacts                                                         |              |                 |                                                                                    |
| N/O contact                                                           |              | g               | 10                                                                                 |
| Auxiliary contacts                                                    |              |                 |                                                                                    |
| N/O contact                                                           |              | g               | 7                                                                                  |
| N/C contact                                                           |              | g               | 5                                                                                  |
| Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted |              |                 |                                                                                    |
| Half-sinusoidal shock, 10 ms                                          |              |                 |                                                                                    |
| Main contacts                                                         |              |                 |                                                                                    |
| N/O contact                                                           |              | g               | 6.9                                                                                |
| Auxiliary contacts                                                    |              |                 |                                                                                    |
| N/O contact                                                           |              | g               | 5.3                                                                                |
| N/C contact                                                           |              | g               | 3.5                                                                                |
| Degree of Protection                                                  |              |                 | IP00                                                                               |
| Protection against direct contact when actuated from front (EN 50274) |              |                 | Finger and back-of-hand proof                                                      |
| Weight                                                                |              |                 |                                                                                    |
| AC operated                                                           |              | kg              | 0.428                                                                              |
| Screw connector terminals                                             |              |                 |                                                                                    |
| Terminal capacity main cable                                          |              |                 |                                                                                    |
| Solid                                                                 |              | mm <sup>2</sup> | 1 x (0.75 - 16)<br>2 x (0.75 - 10)                                                 |
| Flexible with ferrule                                                 |              | mm <sup>2</sup> | 1 x (0.75 - 16)<br>2 x (0.75 - 10)                                                 |
| Stranded                                                              |              | mm <sup>2</sup> | 1 x 16                                                                             |
| Solid or stranded                                                     |              | AWG             | single 18 - 6, double 18 - 8                                                       |
| Stripping length                                                      |              | mm              | 10                                                                                 |
| Terminal screw                                                        |              |                 | M5                                                                                 |
| Tightening torque                                                     |              | Nm              | 3.2                                                                                |
| Tool                                                                  |              |                 |                                                                                    |
| Pozidriv screwdriver                                                  |              | Size            | 2                                                                                  |
| Standard screwdriver                                                  |              | mm              | 0.8 x 5.5<br>1 x 6                                                                 |
| Terminal capacity control circuit cables                              |              |                 |                                                                                    |
| Solid                                                                 |              | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)                                                 |
| Flexible with ferrule                                                 |              | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)                                               |
| Solid or stranded                                                     |              | AWG             | 18 - 14                                                                            |

|                      |  |      |                    |
|----------------------|--|------|--------------------|
| Stripping length     |  | mm   | 10                 |
| Terminal screw       |  |      | M3.5               |
| Tightening torque    |  | Nm   | 1.2                |
| Tool                 |  |      |                    |
| Pozidriv screwdriver |  | Size | 2                  |
| Standard screwdriver |  | mm   | 0.8 x 5.5<br>1 x 6 |

## Main conducting paths

|                                        |             |      |       |
|----------------------------------------|-------------|------|-------|
| Rated impulse withstand voltage        | $U_{imp}$   | V AC | 8000  |
| Overvoltage category/pollution degree  |             |      | III/3 |
| Rated insulation voltage               | $U_i$       | V AC | 690   |
| Rated operational voltage              | $U_e$       | V AC | 690   |
| Safe isolation to EN 61140             |             |      |       |
| between coil and contacts              |             | V AC | 440   |
| between the contacts                   |             | V AC | 440   |
| Making capacity (p.f. to IEC/EN 60947) |             |      |       |
|                                        | Up to 690 V | A    | 350   |
| Breaking capacity                      |             |      |       |
| 220 V 230 V                            |             | A    | 250   |
| 380 V 400 V                            |             | A    | 250   |
| 500 V                                  |             | A    | 250   |
| 660 V 690 V                            |             | A    | 150   |
| Short-circuit rating                   |             |      |       |
| Short-circuit protection maximum fuse  |             |      |       |
| Type "2" coordination                  |             |      |       |
| 400 V                                  | gG/gL 500 V | A    | 35    |
| 690 V                                  | gG/gL 690 V | A    | 35    |
| Type "1" coordination                  |             |      |       |
| 400 V                                  | gG/gL 500 V | A    | 100   |
| 690 V                                  | gG/gL 690 V | A    | 50    |

## AC

|                                                           |                |     |     |
|-----------------------------------------------------------|----------------|-----|-----|
| AC-1                                                      |                |     |     |
| Rated operational current                                 |                |     |     |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |     |     |
| Open                                                      |                |     |     |
| at 40 °C                                                  | $I_{th} = I_e$ | A   | 45  |
| at 50 °C                                                  | $I_{th} = I_e$ | A   | 43  |
| at 55 °C                                                  | $I_{th} = I_e$ | A   | 42  |
| at 60 °C                                                  | $I_{th} = I_e$ | A   | 40  |
| enclosed                                                  | $I_{th}$       | A   | 36  |
| Conventional free air thermal current, 1 pole             |                |     |     |
| open                                                      | $I_{th}$       | A   | 100 |
| enclosed                                                  | $I_{th}$       | A   | 90  |
| AC-3                                                      |                |     |     |
| Rated operational current                                 |                |     |     |
| Open, 3-pole: 50 – 60 Hz                                  |                |     |     |
| 220 V 230 V                                               | $I_e$          | A   | 25  |
| 240 V                                                     | $I_e$          | A   | 25  |
| 380 V 400 V                                               | $I_e$          | A   | 25  |
| 415 V                                                     | $I_e$          | A   | 25  |
| 440V                                                      | $I_e$          | A   | 25  |
| 500 V                                                     | $I_e$          | A   | 25  |
| 660 V 690 V                                               | $I_e$          | A   | 15  |
| 380 V 400 V                                               | $I_e$          | A   | 25  |
| Motor rating                                              | P              | kWh |     |

|                          |                |     |      |
|--------------------------|----------------|-----|------|
| 220 V 230 V              | P              | kW  | 7.5  |
| 240V                     | P              | kW  | 8.5  |
| 380 V 400 V              | P              | kW  | 11   |
| 415 V                    | P              | kW  | 14.5 |
| 440 V                    | P              | kW  | 15.5 |
| 500 V                    | P              | kW  | 17.5 |
| 660 V 690 V              | P              | kW  | 14   |
| AC-4                     |                |     |      |
| Open, 3-pole: 50 – 60 Hz |                |     |      |
| 220 V 230 V              | I <sub>e</sub> | A   | 13   |
| 240 V                    | I <sub>e</sub> | A   | 13   |
| 380 V 400 V              | I <sub>e</sub> | A   | 13   |
| 415 V                    | I <sub>e</sub> | A   | 13   |
| 440 V                    | I <sub>e</sub> | A   | 13   |
| 500 V                    | I <sub>e</sub> | A   | 13   |
| 660 V 690 V              | I <sub>e</sub> | A   | 10   |
| Motor rating             | P              | kWh |      |
| 220 V 230 V              | P              | kW  | 3.5  |
| 240 V                    | P              | kW  | 4    |
| 380 V 400 V              | P              | kW  | 6    |
| 415 V                    | P              | kW  | 6.5  |
| 440 V                    | P              | kW  | 7    |
| 500 V                    | P              | kW  | 8    |
| 660 V 690 V              | P              | kW  | 8.5  |

## DC

|                                 |                |   |    |
|---------------------------------|----------------|---|----|
| Rated operational current, open |                |   |    |
| DC-1                            |                |   |    |
| 60 V                            | I <sub>e</sub> | A | 40 |
| 110 V                           | I <sub>e</sub> | A | 40 |
| 220 V                           | I <sub>e</sub> | A | 40 |

## Current heat loss

|                                                   |  |    |      |
|---------------------------------------------------|--|----|------|
| 3 pole, at I <sub>th</sub> (60°)                  |  | W  | 10.8 |
| Current heat loss at I <sub>e</sub> to AC-3/400 V |  | W  | 4.2  |
| Impedance per pole                                |  | mΩ | 2.7  |

## Magnet systems

|                                                                        |          |                  |           |
|------------------------------------------------------------------------|----------|------------------|-----------|
| Voltage tolerance                                                      |          |                  |           |
| AC operated                                                            | Pick-up  | x U <sub>c</sub> | 0.8 - 1.1 |
| Drop-out voltage AC operated                                           | Drop-out | x U <sub>c</sub> | 0.3 - 0.6 |
| Power consumption of the coil in a cold state and 1.0 x U <sub>S</sub> |          |                  |           |
| 50 Hz                                                                  | Pick-up  | VA               | 52        |
| 50 Hz                                                                  | Sealing  | VA               | 7.1       |
| 50 Hz                                                                  | Sealing  | W                | 2.1       |
| 60 Hz                                                                  | Pick-up  | VA               | 67        |
| 60 Hz                                                                  | Sealing  | VA               | 8.7       |
| 60 Hz                                                                  | Sealing  | W                | 2.1       |
| Duty factor                                                            |          | % DF             | 100       |
| Changeover time at 100 % U <sub>S</sub> (recommended value)            |          |                  |           |
| Main contacts                                                          |          |                  |           |
| AC operated                                                            |          |                  |           |
| Closing delay                                                          |          | ms               | 16 - 22   |
| Opening delay                                                          |          | ms               | 8 - 14    |
| Arcing time                                                            |          | ms               | 10        |

## Electromagnetic compatibility (EMC)

|                       |  |  |               |
|-----------------------|--|--|---------------|
| Emitted interference  |  |  | to EN 60947-1 |
| Interference immunity |  |  | to EN 60947-1 |

## Rating data for approved types

|                                                           |      |                 |  |
|-----------------------------------------------------------|------|-----------------|--|
| Switching capacity                                        |      |                 |  |
| Maximum motor rating                                      |      |                 |  |
| Three-phase                                               |      |                 |  |
| 200 V<br>208 V                                            | HP   | 7.5             |  |
| 230 V<br>240 V                                            | HP   | 10              |  |
| 460 V<br>480 V                                            | HP   | 15              |  |
| 575 V<br>600 V                                            | HP   | 20              |  |
| Single-phase                                              |      |                 |  |
| 115 V<br>120 V                                            | HP   | 2               |  |
| 230 V<br>240 V                                            | HP   | 5               |  |
| General use                                               | A    | 40              |  |
| Auxiliary contacts                                        |      |                 |  |
| Pilot Duty                                                |      |                 |  |
| AC operated                                               |      | A600            |  |
| DC operated                                               |      | P300            |  |
| General Use                                               |      |                 |  |
| AC                                                        | V    | 600             |  |
| AC                                                        | A    | 10              |  |
| DC                                                        | V    | 250             |  |
| DC                                                        | A    | 1               |  |
| Short Circuit Current Rating                              | SCCR |                 |  |
| Basic Rating                                              |      |                 |  |
| SCCR                                                      | kA   | 5               |  |
| max. Fuse                                                 | A    | 125             |  |
| max. CB                                                   | A    | 125             |  |
| 480 V High Fault                                          |      |                 |  |
| SCCR (fuse)                                               | kA   | 10/100          |  |
| max. Fuse                                                 | A    | 125/70 Class J  |  |
| SCCR (CB)                                                 | kA   | 10/65           |  |
| max. CB                                                   | A    | 50/32           |  |
| 600 V High Fault                                          |      |                 |  |
| SCCR (fuse)                                               | kA   | 10/100          |  |
| max. Fuse                                                 | A    | 125/100 Class J |  |
| SCCR (CB)                                                 | kA   | 10/22           |  |
| max. CB                                                   | A    | 50/32           |  |
| Special Purpose Ratings                                   |      |                 |  |
| Electrical Discharge Lamps (Ballast)                      |      |                 |  |
| 480V 60Hz 3phase, 277V 60Hz 1phase                        | A    | 40              |  |
| 600V 60Hz 3phase, 347V 60Hz 1phase                        | A    | 40              |  |
| Incandescent Lamps (Tungsten)                             |      |                 |  |
| 480V 60Hz 3phase, 277V 60Hz 1phase                        | A    | 40              |  |
| 600V 60Hz 3phase, 347V 60Hz 1phase                        | A    | 40              |  |
| Resistance Air Heating                                    |      |                 |  |
| 480V 60Hz 3phase, 277V 60Hz 1phase                        | A    | 40              |  |
| 600V 60Hz 3phase, 347V 60Hz 1phase                        | A    | 40              |  |
| Refrigeration Control (CSA only)                          |      |                 |  |
| LRA 480V 60Hz 3phase                                      | A    | 240             |  |
| FLA 480V 60Hz 3phase                                      | A    | 40              |  |
| LRA 600V 60Hz 3phase                                      | A    | 180             |  |
| FLA 600V 60Hz 3phase                                      | A    | 30              |  |
| Definite Purpose Ratings (100,000 cycles acc. to UL 1995) |      |                 |  |

|                      |    |      |
|----------------------|----|------|
| LRA 480V 60Hz 3phase | A  | 150  |
| FLA 480V 60Hz 3phase | A  | 25   |
| Elevator Control     |    |      |
| 200V 60Hz 3phase     | HP | 3    |
| 200V 60Hz 3phase     | A  | 11   |
| 240V 60Hz 3phase     | HP | 5    |
| 240V 60Hz 3phase     | A  | 15.2 |
| 480V 60Hz 3phase     | HP | 10   |
| 480V 60Hz 3phase     | A  | 14   |
| 600V 60Hz 3phase     | HP | 15   |
| 600V 60Hz 3phase     | A  | 17   |

## Design verification as per IEC/EN 61439

|                                                                                                                        |                   |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|-------------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |                   |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | I <sub>n</sub>    | A  | 25                                                                                                                               |
| Heat dissipation per pole, current-dependent                                                                           | P <sub>vid</sub>  | W  | 1.4                                                                                                                              |
| Equipment heat dissipation, current-dependent                                                                          | P <sub>vid</sub>  | W  | 4.2                                                                                                                              |
| Static heat dissipation, non-current-dependent                                                                         | P <sub>vs</sub>   | W  | 2.1                                                                                                                              |
| Heat dissipation capacity                                                                                              | P <sub>diss</sub> | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |                   | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |                   | °C | 60                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |                   |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |                   |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |                   |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                                                                              |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

|                                                                                                                                                                                       |   |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-----------|
| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)                                                                                               |   |           |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) |   |           |
| Rated control supply voltage Us at AC 50HZ                                                                                                                                            | V | 230 - 230 |
| Rated control supply voltage Us at AC 60HZ                                                                                                                                            | V | 240 - 240 |
| Rated control supply voltage Us at DC                                                                                                                                                 | V | 0 - 0     |


|                                                         |    |                  |
|---------------------------------------------------------|----|------------------|
| Voltage type for actuating                              |    | AC               |
| Rated operation current Ie at AC-1, 400 V               | A  | 45               |
| Rated operation current Ie at AC-3, 400 V               | A  | 25               |
| Rated operation power at AC-3, 400 V                    | kW | 11               |
| Rated operation current Ie at AC-4, 400 V               | A  | 13               |
| Rated operation power at AC-4, 400 V                    | kW | 6                |
| Rated operation power NEMA                              | kW | 11               |
| Modular version                                         |    | No               |
| Number of auxiliary contacts as normally open contact   |    | 1                |
| Number of auxiliary contacts as normally closed contact |    | 0                |
| Type of electrical connection of main circuit           |    | Screw connection |
| Number of normally closed contacts as main contact      |    | 0                |
| Number of main contacts as normally open contact        |    | 3                |

## Approvals


|                                      |  |                                                                          |
|--------------------------------------|--|--------------------------------------------------------------------------|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  | E29096                                                                   |
| UL Category Control No.              |  | NLDX                                                                     |
| CSA File No.                         |  | 012528                                                                   |
| CSA Class No.                        |  | 2411-03, 3211-04                                                         |
| North America Certification          |  | UL listed, CSA certified                                                 |
| Specially designed for North America |  | No                                                                       |




- 1: Overload relay
- 2: Suppressor
- 3: Auxiliary contact modules

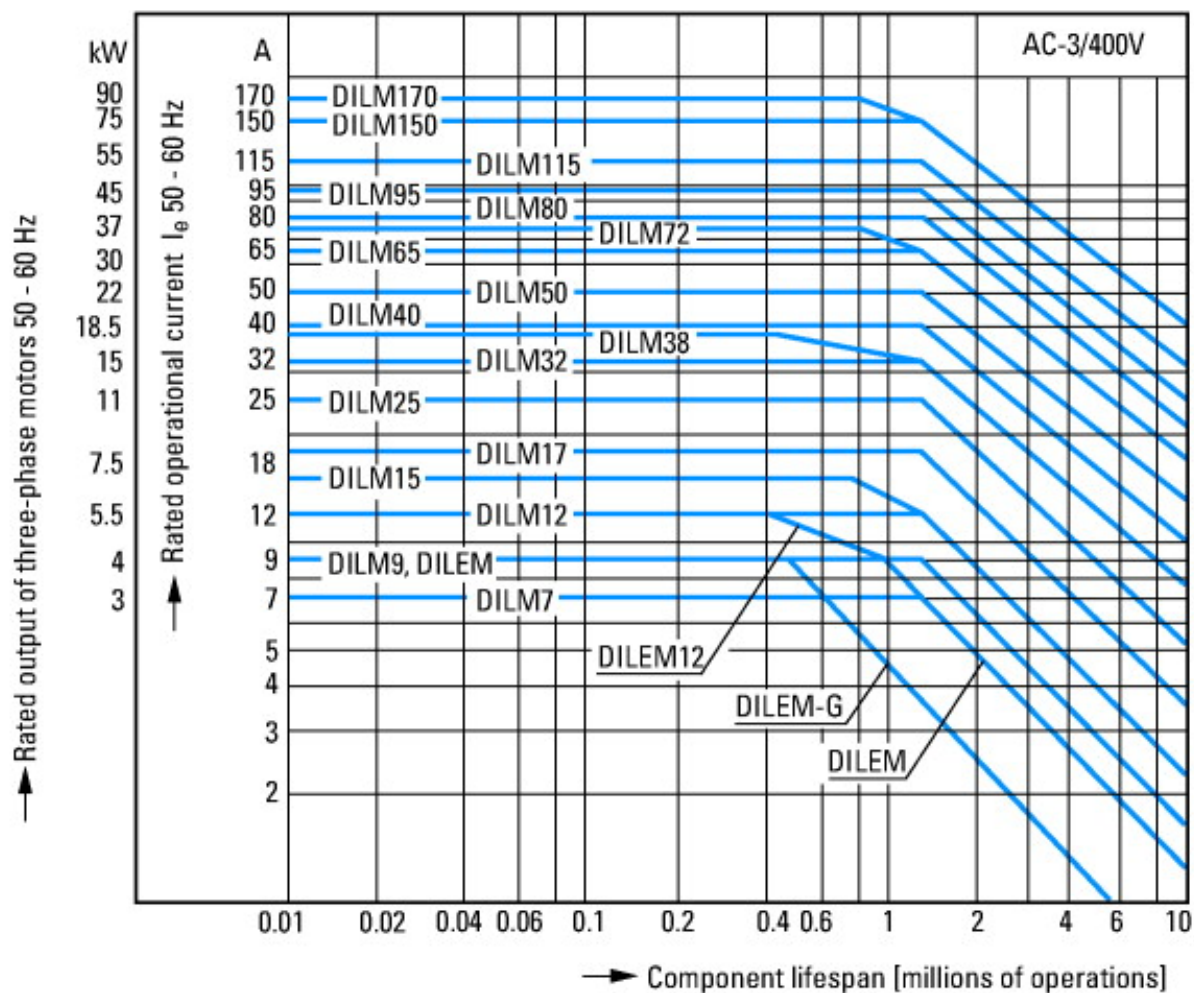

Squirrel-cage motor  
 Operating characteristics  
 Starting: from rest  
 Stopping: after attaining full running speed  
 Electrical characteristics  
 Make: up to 6 x rated motor current  
 Break: up to 1 x rated motor current  
 Utilization category  
 100 % AC-3  
 Typical applications  
 Compressors  
 Lifts  
 Mixers  
 Pumps  
 Escalators  
 Agitators  
 Fans  
 Conveyor belts  
 Centrifuges  
 Hinged flaps  
 Bucket-elevators  
 Air conditioning system  
 General drives in manufacturing and processing machines

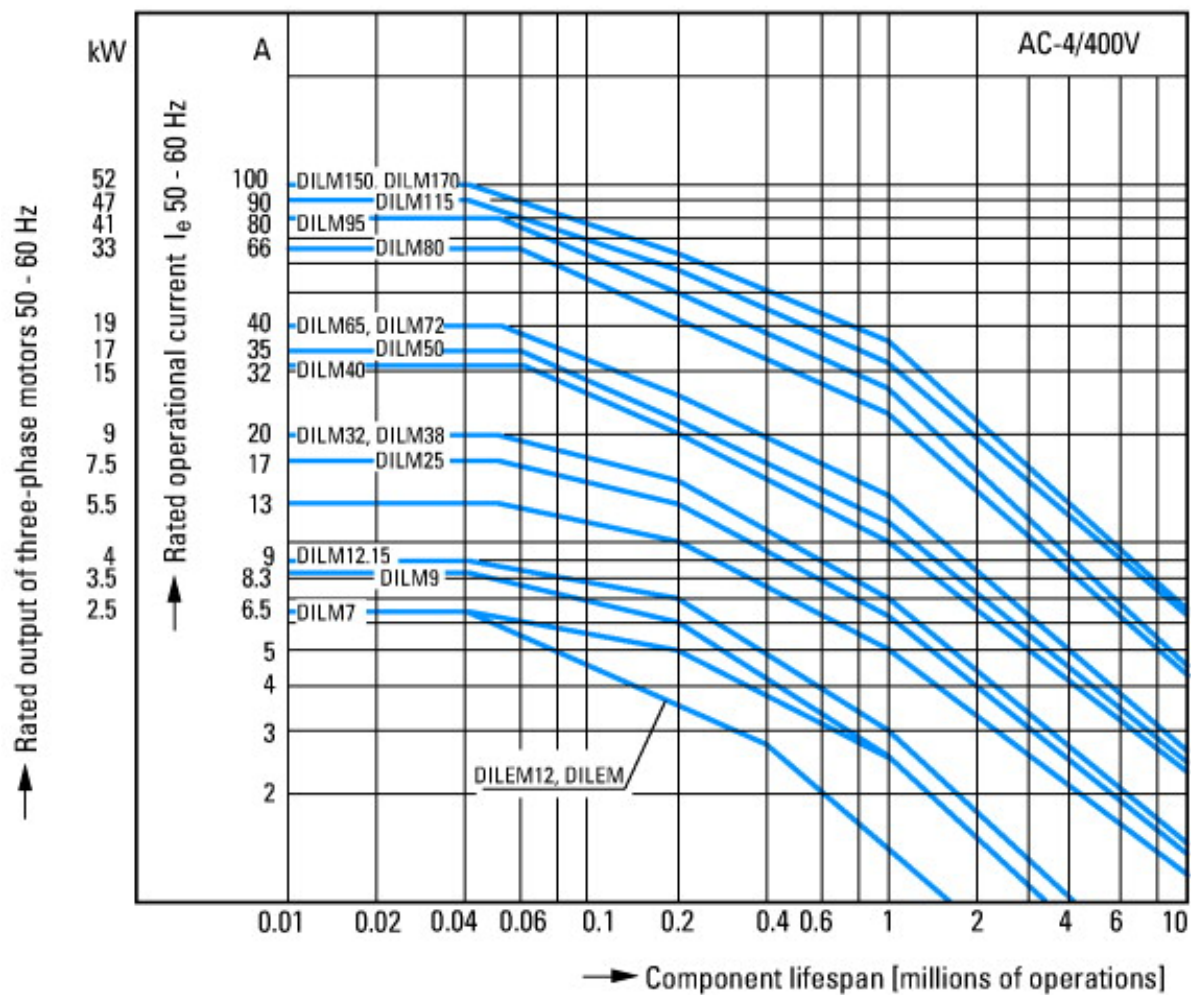


Extreme switching duty  
Squirrel-cage motor  
Operating characteristics  
Inching, plugging, reversing  
Electrical characteristics  
Make: up to 6 x rated motor current  
Break: up to 6 x rated motor current  
Utilization category  
100 % AC-4  
Typical applications  
Printing presses  
Wire-drawing machines  
Centrifuges  
Special drives for manufacturing and processing machines

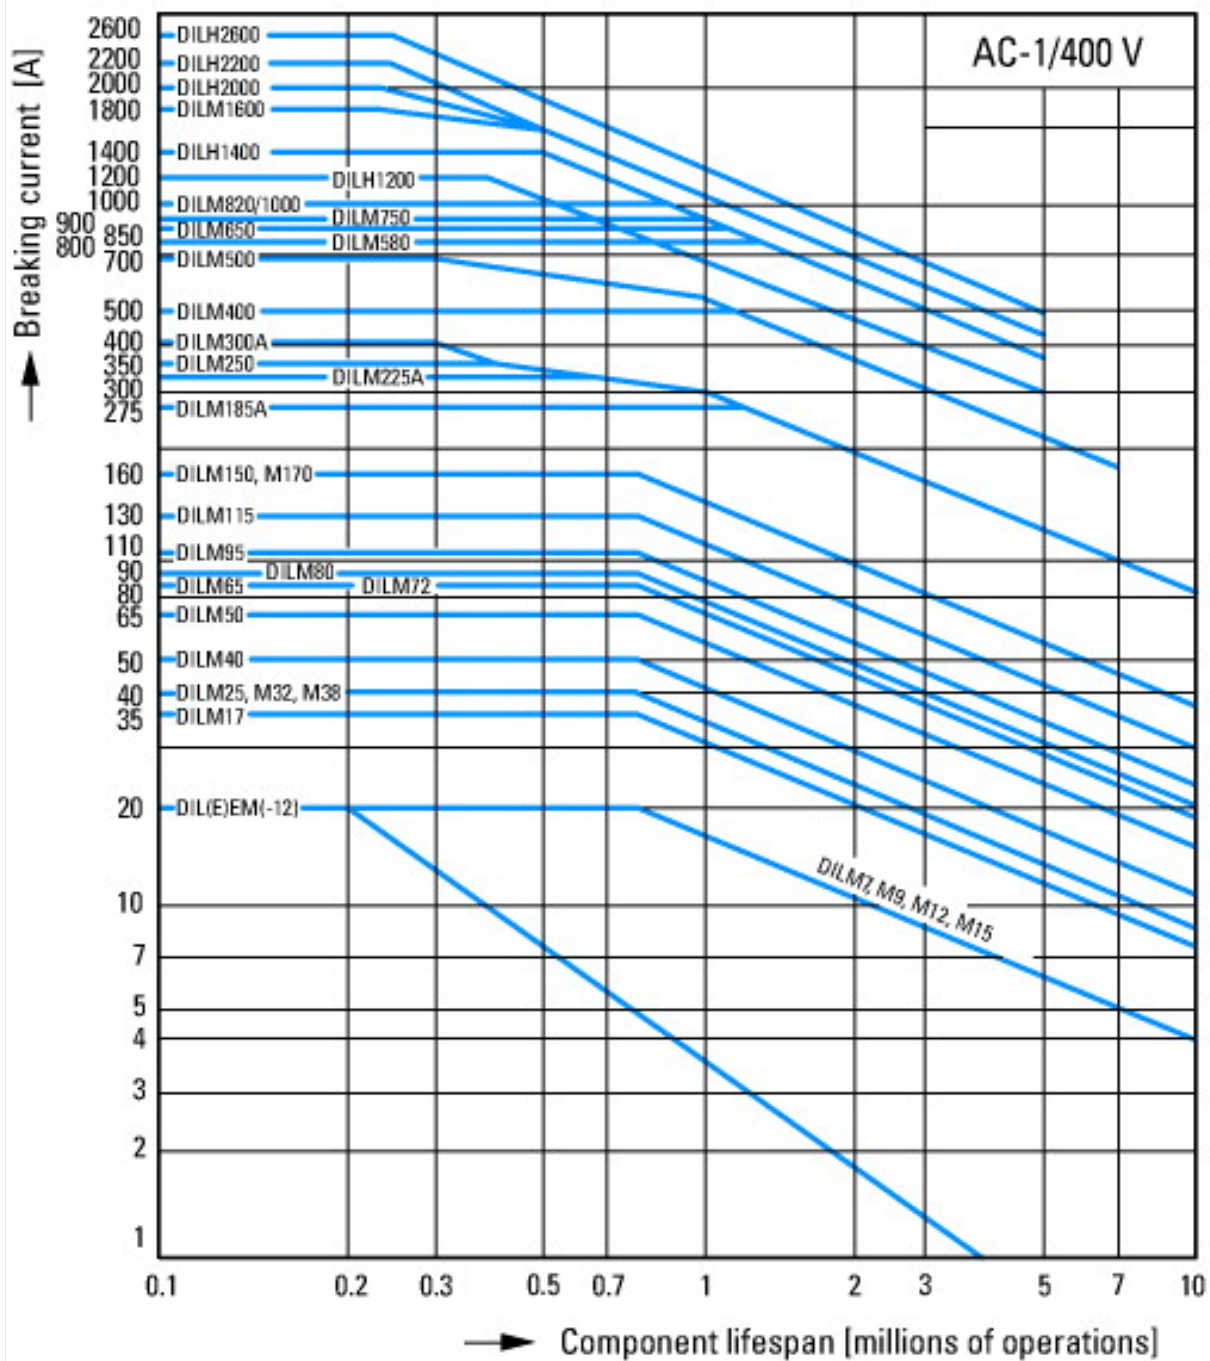


Switching conditions for non-motor consumers, 3 pole, 4 pole  
 Operating characteristics  
 Non inductive and slightly inductive loads  
 Electrical characteristics  
 Switch on: 1 x rated operational current  
 Switch off: 1 x rated operational current  
 Utilization category  
 100 % AC-1  
 Typical examples of application  
 Electric heat

## Dimensions

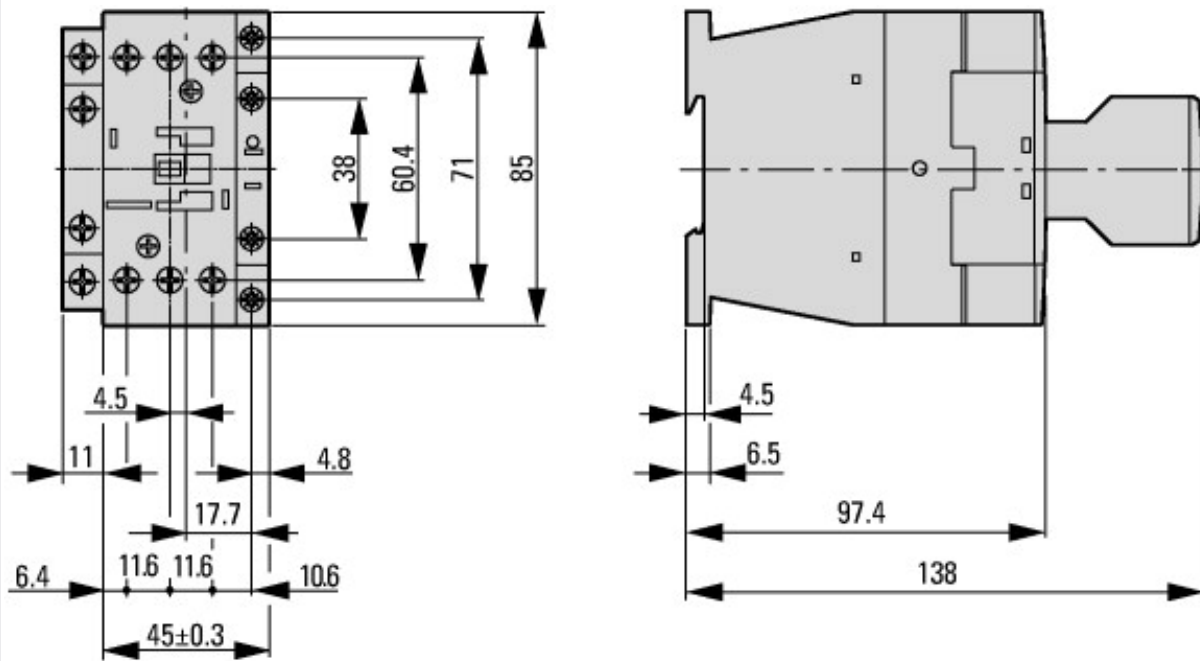

Contactor with auxiliary contact module

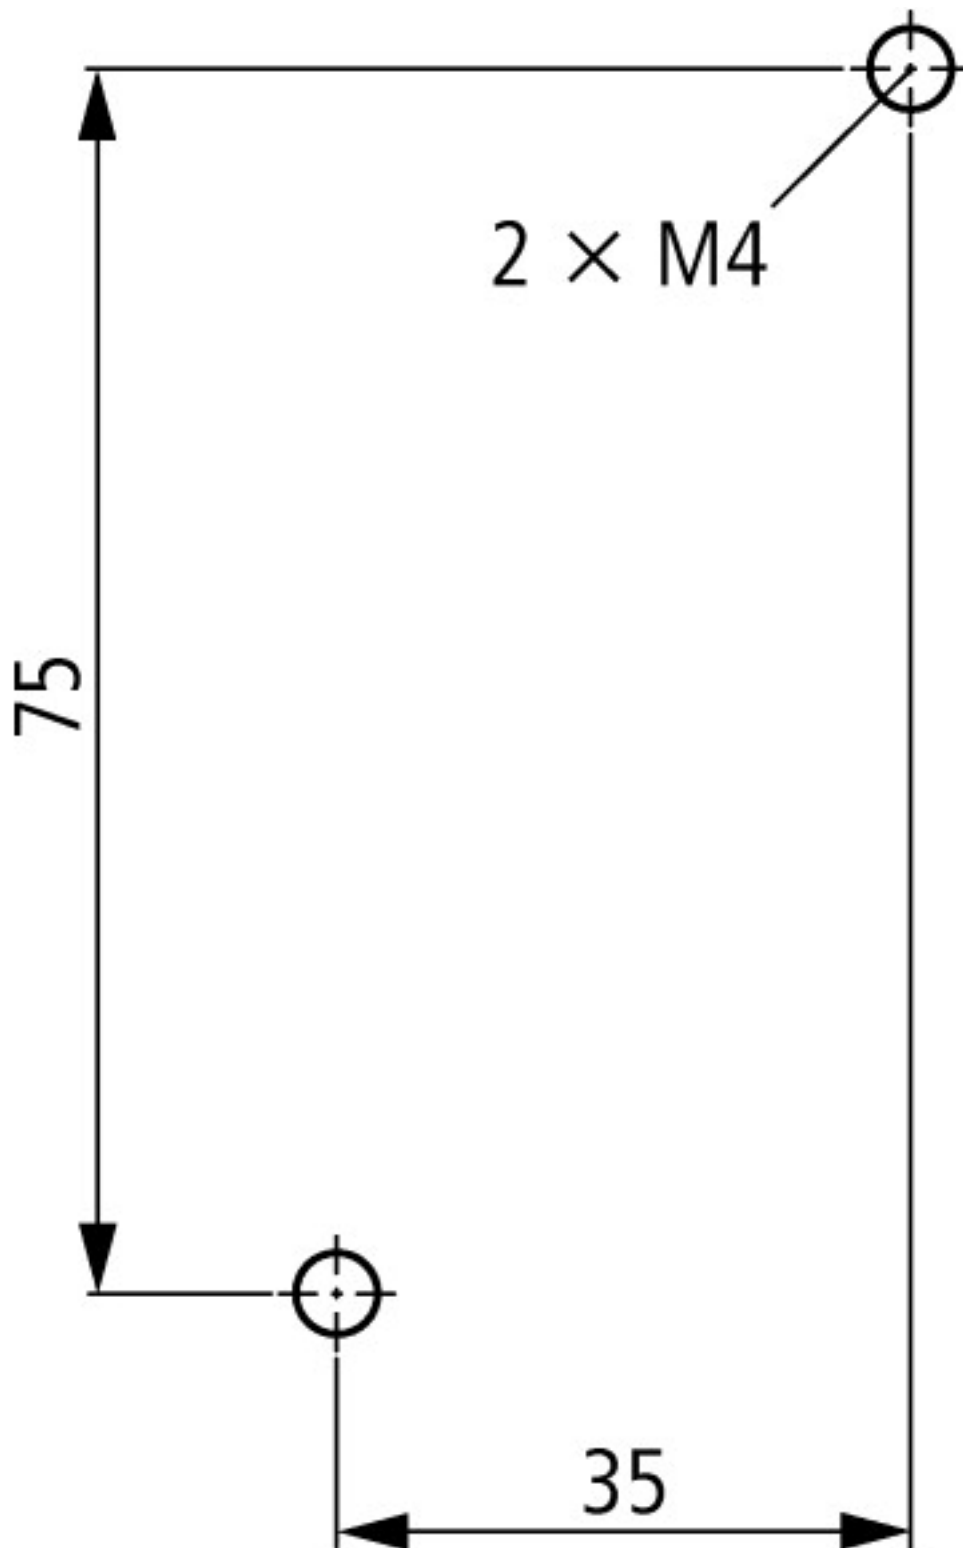

distance at side to earthed parts: 6 mm

## Additional product information (links)

### IL03407014Z (AWA2100-2127) Contactor

|                                                                                              |                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IL03407014Z (AWA2100-2127) Contactor                                                         | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407014Z2018_07.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407014Z2018_07.pdf</a>                                           |
| Motor starters and "Special Purpose Ratings" for the North American market                   | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf</a> |
| Switchgear of Power Factor Correction Systems                                                | <a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a>                                                                               |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely               | <a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a>                                                                               |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions | <a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a>                                                                               |
| Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors        | <a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a>                                                                               |
| Switchgear for Luminaires                                                                    | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a>                                                                               |

|                                                                                                |                                                                                                                                   |
|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a> |
| The Interaction of Contactors with PLCs                                                        | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |